

# ADORN® Post Stone

## INSTALLATION INSTRUCTIONS

### TOOLS NEEDED FOR INSTALLATION:

- Safety glasses
- Gloves
- Level
- Proper sized screws or nails
- Measuring Tape
- Caulking gun
- Construction Adhesive

Adorn Post Stone is designed to fit on a 6" X 6" post.

When using treated wood, a layer of a peel & stick rubberized asphalt membrane must be used, like ProtectoWrap Deck Joist tape, or equivalent. The fastener used must be rated to be used on treated wood, GRK R4, U2 Universal, or equivalent.




### Installing the Post Stone



Attach the base course first. Place 4 Post Stones around the base of the 6" X 6" post as shown. Level the base course and attach with 2 screws per Post Stone through the attaching flange approximately 1" above the stone veneer.

Continue installing the Post Stones one course at a time. Square up the corners, check for level and attach with screws.

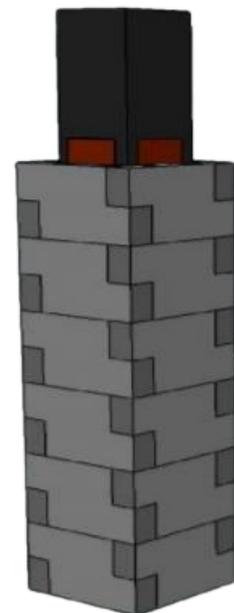

## IMPORTANT INFORMATION

- Ensure that Adorn is being installed to a structure that meets all building code requirements. Code approved flashing must be used at all terminations, penetrations, and material transitions. Control moisture penetration caused by run off, gutters, and downspouts. If there is any question as to the integrity of the structure, contact the appropriate professional to correct. Adorn should maintain a 2” clearance from hard surfaces such as pavement and patio surfaces.
- When cutting, grinding, or trimming any Adorn pieces, always follow the tool manufacturer’s safety instructions and use the appropriate safety protection.
- Cutting dust and general construction dust can be removed with clean water and if needed, a nylon bristle brush. Do not clean with a power washer, harsh chemicals, or acid products.
- The small side of the corner occasionally may not fit as snug as desired. If needed, a dab of construction adhesive can be applied to the back of the piece to ensure a snug fit.
- The corners are manually checked to fit together and are packaged as a set. There are 4 sets placed in the box together and the remaining 2 sets have the 5.5” pieces at one end of the box with the 2 9.5” pieces lying flat on the top. When installing corners, use the sets as they are shipped.

Adorn / Rust-Oleum coordinating colors to touch up the base color:

Colorado Gray - #249279 Primer Gray  
Northern Gray - #249279 Primer Gray  
Buckskin - #7226 Bronze

Desert Tan - #7772 Putty  
Terra - #249857 Satin London Gray